

Solar Lighting



 **elinett**



+ 221 77 421 10 40

 www.oceanic-sn.com

 Dakar, Mermoz Rue MZ 146 , N° 7184.  info@oceanic-sn.com

Contents



Integrated solar street light

- Long working time;
- Easy to install;
- Free electricity.

 01-19



Split solar street light

- Super bright LED chips;
- Larger solar panel;
- Fast charging.

 20-27



Solar Flood light

- Long life lithium battery;
- Aluminum lamp body;
- Remote control.

 28-29



Solar Garden Light

- High-efficiency LED chip
- Will light up from dusk to dawn automatically
- High capacity lithium iron phosphate battery

 30-32



More Solar Products

- High-efficiency LED chip
- Will light up from dusk to dawn automatically
- High capacity lithium iron phosphate battery

 33-35



ALL IN ONE SOLAR STREET LIGHT HZ-TY-003



Product Parameter

Model	HZ-TY-003 40W	HZ-TY-003 60W	HZ-TY-003 120W	HZ-TY-003 180W
Solar panel(MONO)	18V 25W	18V 35W	18V 45W	18V 70W
High capacity lithium battery (Built-in)	11.1V 12AH	11.1V 16AH	11.1V 22AH	11.1V 28AH
LED power	40W	60W	120W	180W
Light material	AL	AL	AL	AL
Charing time	6H	6H	6H	6H
Rainday working	2-3days	2-3days	2-3days	2-3days
Lighting time	12-16 hours	12-16 hours	12-16 hours	12-16 hours
Beam angle	120°	120°	120°	120°
Installation height	3-5M	3-5M	5-7M	7-8M
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Products size (mm)	549*294*67.5	659*367*63.5	789*367*63.5	1000*430*83.5

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-004




Product Parameter

Model	HZ-TY-004 60W	HZ-TY-004 120W	HZ-TY-004 180W
Solar panel (poly)	6V 10W	6V 17W	6V 25W
High capacity lithium battery (Built-in)	3.2V 10AH Lithium iron phosphate	3.2V 15AH Lithium iron phosphate	3.2V 20AH Lithium iron phosphate
LED Chip	300PCS	624PCS	900PCS
Material	Aluminum	Aluminum	Aluminum
Charing time	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days
Working time	12-16H	12-16H	12-16H
illuminate range	70-90m ²	100-120m ²	150-180m ²
Net weight	2.8kgs	4.1kgs	5.3kgs
Storage temperature	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH
Waterproof level	Ip66	Ip66	Ip66
Products size (mm)	530*240*60	630*270*80	780*290*80

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-005



Product Parameter

Model	HZ-TY-005-100W	HZ-TY-005-180W	HZ-TY-005-200W
Solar panel(MONO)	6V / 25W	6V/35W	6V / 50W
High capacity lithium battery (Built-in)	3.2V / 30AH	3.2V / 40AH	3.2V / 60AH
LED Chip	100PCS SMD3030	180PCS SMD3030	240PCS SMD3030
LED Lumen	130lm/w	130lm/w	130lm/w
Charing time	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days
Working time	>12hours	>12hours	>12hours
Lighting area	60m ²	60m ²	60m ²
Arm rod size	60mm	60mm	60mm
Storage temperature	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH
Waterproof level	Ip66	Ip66	Ip66
Products size (mm)	55*32*10cm /2.62KG / 1pcs	65*38*10cm /3.8KG / 1pcs	65*38*10cm /3.8KG / 1pcs

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-006

150W




Battery



LED chip



Controller



Solar panel

Product Parameter

Model	HZ-TY-006-50W	HZ-TY-006-100W	HZ-TY-006-150W	HZ-TY-006-200W
Solar panel(MONO)	6V / 20W	6V / 30W	6V / 40W	6V / 60W
High capacity lithium battery (Built-in)	3.2V / 20AH	3.2V / 30AH	3.2V / 40AH	3.2V / 60AH
LED Chip	100pcs, SMD3030	200pcs, SMD3030	300pcs, SMD3030	400pcs, SMD3030
LED Lumen	>120lm/w	>120lm/w	>120lm/w	>120lm/w
Charing time	4-6H	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days	2-3days
Lighting time	12-16 hours	12-16 hours	12-16 hours	12-16 hours
Beam angle	120°	120°	120°	120°
Materail	Aluminum body	Aluminum body	Aluminum body	Aluminum body
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Products size (mm)	505*320*50	670*320*50	1000*320*50	1200*320*50

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-006C



Product Parameter

Model	HZ-TY-006-50W	HZ-TY-006-100W	HZ-TY-006-150W	HZ-TY-006-200W
Solar panel(MONO)	6V / 20W	6V / 30W	6V / 40W	6V / 60W
High capacity lithium battery (Built-in)	3.2V / 20AH	3.2V / 30AH	3.2V / 40AH	3.2V / 60AH
LED Chip	100pcs, SMD3030	200pcs, SMD3030	300pcs, SMD3030	400pcs, SMD3030
LED Lumen	>120lm/w	>120lm/w	>120lm/w	>120lm/w
Charing time	4-6H	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days	2-3days
Lighting time	12-16 hours	12-16 hours	12-16 hours	12-16 hours
Beam angle	120°	120°	120°	120°
Materail	Aluminum body	Aluminum body	Aluminum body	Aluminum body
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Products size (mm)	505*320*50	670*320*50	1000*320*50	1200*320*50

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-006S

150W



Battery



LED chip



Controller



Solar panel

Product Parameter

Model	HZ-TY-006S-50W	HZ-TY-006S-100W	HZ-TY-006S-150W	HZ-TY-006S-200W
Solar panel(MONO)	6V / 20W	6V / 30W	6V / 40W	6V / 60W
High capacity lithium battery (Built-in)	3.2V / 20AH	3.2V / 30AH	3.2V / 40AH	3.2V / 60AH
LED Chip	99pcs ,SMD5730	200pcs, SMD3030	300pcs, SMD3030	400pcs, SMD3030
LED Lumen	>120lm/w	>120lm/w	>120lm/w	>120lm/w
Charing time	4-6H	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days	2-3days
Lighting time	12-16 hours	12-16 hours	12-16 hours	12-16 hours
Suggested installation height	about 3M	about 5M	about 6M	about 7M
Materail	Aluminum body	Aluminum body	Aluminum body	Aluminum body
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Products size (mm)	505*320*50	670*320*50	1000*320*50	1200*320*50

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-007



Product Parameter

Item NO	Specification	Solar capacity	Lumen (lm/W)	Products dimension	Suggestion install height
HZ-TY-007 10W	1.LED : smd3030	18V 17W(mono) Lithum battery 11.1V 6AH	1000	438*300*43/50	3-4M
HZ-TY-007 15W	2.Material: Aluminum alloy	18V 36W(mono) Lithum battery 11.1V 11AH	1875	828*300*43/50	4-5M
HZ-TY-007 30W	3. Waterproof grade: IP65	18V 55W(mono) Lithum battery 11.1V 24AH	3750	1080*359*43/50	5-6M
HZ-TY-007 40W	4. Charging time:8H strong sunlight	18V 80W(mono) Lithum battery 11.1V 36AH	5000	1250*359*43/50	6-7m
HZ-TY-007 50W	5.Light model :Light+body induction+time	18V 80W(mono) Lithum battery 11.1V 40AH	6250	1250*359*43/50	7-8m
HZ-TY-007 60W	6.Working time :All light >8hours, Power saving mode>24hours	18V 110W(mono) Lithum battery 11.1V 48AH	7500	1250*528*43/50	8-9m
HZ-TY-007 70W	7.Beam angle :120°	18V 110W(mono) Lithum battery 11.1V 52AH	8750	1250*528*43/50	9-10m
HZ-TY-007 90W	8.Color:3000-7000K	18V 140W(mono) Lithum battery 11.1V 72AH	11250	1480*528*43/50	10-11m
HZ-TY-007 100W	9.Light pole diameter:40-76mm	18V 150W(mono) Lithum battery 11.1V 80AH	11380	1480*528*43/50	11-12m
	10.Stroage temperature :0-55°				
	11.Operating Humidity 90RH%				
	12.Discharge temperature :-10~60°				

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-009



Product Parameter

Model	HZ-TY-009-80W	HZ-TY-009-160W	HZ-TY-009-240W	HZ-TY-006-3200W
Solar panel(MONO)	10V 30W	10V 45W	10V 65W	10V 88W
High capacity lithium battery (Built-in)	6.4V 12AH	6.4V 20AH	6.4V 30AH	6.4V 35AH
LED Chip	2835 LED 160pcs	2835 LED 320pcs	2835 LED 480pcs	2835 LED 480pcs
LED Lumen	150lm/w	150LM/W	150LM/W	150LM/W
Charing time	6H	6H	6H	6H
Rainday working	2-3days	2-3days	2-3days	2-3days
Work time	12-16 hours	12-16 hours	12-16 hours	12-16 hours
Beam angle	120°	120°	120°	120°
Materail	Aluminum	Aluminum	Aluminum	Aluminum
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Products size (mm)	530*350*160	660*350*160	1040*350*160	1150*350*160

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-010




Product Parameter

Model	HZ-TY-010-150W	HZ-TY-010-200W	HZ-TY-010-250W
Solar panel(MONO)	5V 30W	5V 40W	5V 40W
High capacity lithium battery (Built-in)	3.2V 30AH	3.2V 40AH	3.2V 50AH
LED Chip	SMD3030 LED240pcs	SMD3030 LED320pcs	SMD3030 LED400pcs
LED Lumen	150LM/W	150LM/W	150LM/W
Charing time	6H	6H	6H
Rainday working	2-3days	2-3days	2-3days
Working time	12-16 hours	12-16 hours	12-16 hours
Beam angle	120°	120°	120°
CCT	6000K-6500K	6000K-6500K	6000K-6500K
Storage temperature	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip66
Products size (mm)	632*342*60	700*342*60	700*342*60


Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-011

80W




Battery



LED chip



Controller



Solar panel

Product Parameter

Item NO	Specification	Capacity Battery	LED Chip	Products dimension(mm)	Suggestion install height
HZ-TY-011 30W	1.LED Lumen>120lm/w 2.Materail: Aluminum body 3.Waterproof: IP65 4.Charing time: 8H 5.Rainday working:2- 3days 6. Working time: 12-16 hours 7. Arm rod size: 60 mm diameter 8. Installation method: wall mounting and arm mounting are acceptable	Solar panels : 18V / 60W Battery capacity : 12v 20AH	72PCS , SMD3030	1060*385*43	5-6M
HZ-TY-011 40W		Solar panels : 18V / 70W Battery capacity : 12V / 25AH	96PCS , SMD3030	1210*385*43	6-7M
HZ-TY-011 50W		Solar panels : 18V / 80W Battery capacity : 12V / 28AH	120PCS , SMD3030	1390*385*43	7-8M
HZ-TY-011 60W		Solar panels : 18V / 90W Battery capacity : 12V / 30AH	144PCS , SMD3030	1535*385*43	7-8M
HZ-TY-011 70W		Solar panels : 16V / 100W Battery capacity : 12V / 36AH	168PCS , SMD3030	1690*385*43	8-9M
HZ-TY-011 80W		Solar panels : 16V / 120W Battery capacity : 12V / 40AH	192PCS , SMD3030	1805*385*60	8-9M


Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-011s

80W



Battery



LED chip



Controller



Solar panel

Product Parameter

Item NO	Specification	Capacity Battery	LED Chip	Products dimension(mm)	Suggestion install height
HZ-TY-011 30W	1.LED Lumen>120lm/w 2.Materail: Aluminum body 3.Waterproof: IP65 4.Charing time: 8H 5.Rainday working:2- 3days 6. Working time: 12-16 hours 7. Arm rod size: 60 mm diameter 8. Installation method: wall mounting and arm mounting are acceptable	Solar panels : 6V / 60W Battery capacity : 3.2V / 65AH	72PCS , SMD3030	1060*385*43	5-6M
HZ-TY-011 40W		Solar panels : 6V / 70W Battery capacity : 3.2V / 78AH	96PCS , SMD3030	1210*385*43	6-7M
HZ-TY-011 50W		Solar panels : 6V / 80W Battery capacity : 3.2V / 90AH	120PCS , SMD3030	872*387*68	7-8M
HZ-TY-011 60W		Solar panels : 16V / 90W Battery capacity : 12.8V / 25AH	144PCS , SMD3030	1122*387*68	7-8M
HZ-TY-011 70W		Solar panels : 16V / 100W Battery capacity : 12.8V / 30AH	168PCS , SMD3030	1690*385*43	8-9m
HZ-TY-011 80W		Solar panels : 16V / 120W Battery capacity : 12.8V / 35AH	192PCS , SMD3030	1362*387*68	8-9m

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-012



Product Parameter

Model	HZ-TY-012-300W	HZ-TY-012-400W	HZ-TY-012-500W
Solar panel(MONO)	18 V 60W	18V 80W	18V 100W
High capacity lithium battery (Built-in)	12.8V 18AH	12.8V 24AH	12.8V 30AH
LED Chip	306pcs	406pcs	510pcs
LED Lumen	130lm/w	130lm/w	130lm/w
Charing time	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days
Working time	12-16 hours	12-16 hours	12-16 hours
Lighting area	60m ²	60m ²	60m ²
CRI	>70	>70	>70
Storage temperature	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip66
Products size (mm)	887*400*280	1160*400*280	1435*400*280

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-013



Product Parameter

Model	HZ-TY-013-300W	HZ-TY-013-400W	HZ-TY-013-500W
Solar panel(MONO)	5V / 40W	5V / 45W	5V / 50W
High capacity lithium battery (Built-in)	30AH	35AH	40AH
LED Chip	306pcs	409pcs	480pcs
LED Lumen	130lm/w	130lm/w	130lm/w
Charing time	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days
Working time	12-16 hours	12-16 hours	12-16 hours
Life time	50000 hours	50000 hours	50000 hours
CRI	>70	>70	>70
Storage temperature	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip66
Products size (mm)	703*365*87	810*365*87	916*365*87


Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-014

200W



Battery



LED chip



Controller



Solar panel

Product Parameter

Model	HZ-TY-014 100W 2M	HZ-TY-014 150W 3M	HZ-TY-014 200W 4M
Solar panel(poly)	6v 60w	6v 80w	6v 100w
High capacity lithium battery (Built-in)	3.2v 50Ah	3.2v 70Ah	3.2v 80Ah
LED Chip	100pcs SMD3030	150pcs smd3030	200pcs smd3030
Material	Aluminum alloy	Aluminum alloy	Aluminum alloy
Charing time	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days
Working time	12-16 hours	12-16 hours	12-16 hours
Life time	10-14 hours of Sustainable Lighting	10-14 hours of Sustainable Lighting	10-14 hours of Sustainable Lighting
Installation height	6-7Meters	6-7Meters	6-7Meters
Storage temperature	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip66
Products size (mm)	955*400mm	1135*400mm	1335*400mm

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-015



Product Parameter

Model	HZ-TY-015	HZ-TY-015	HZ-TY-015
Solar panel(MONO)	5V/35W	5V/40W	5V/60W
High capacity lithium battery (Built-in)	3.2V40AH	3.2V 50AH	3.2V 60AH
Control method	10A controller	10A controller	10A controller
Material	Aluminum alloy	Aluminum alloy	Aluminum alloy
Description	<p>【Option 1 accessories set】: 1 set of rocker joints, 1 aluminum frame, 1 battery compartment, 2 horizontal frame bars, 2 vertical frame bars, 1 carbon steel shell.</p> <p>【Option 2 Accessories set】: 1 set of aluminum sleeve joints, 1 aluminum frame, 2 horizontal frame bars, 2 vertical frame bars, 1 carbon steel shell.</p> <p>Lens + waterproof rubber ring + aluminum substrate + 3535 lamp beads + assembly</p>	<p>【Option 1 accessories set】: 1 set of rocker arm joints, 1 aluminum frame, 1 battery compartment, 2 frame horizontal bars, 2 frame vertical bars, 1 carbon steel shell.</p> <p>【Option 2 Accessories set】: 1 set of aluminum socket joints, 1 aluminum frame, 2 horizontal frame bars, 2 vertical frame bars, 1 carbon steel shell.</p> <p>Lens+Waterproof Ring+Aluminum Substrate+3535 Lamp Beads+Assembly</p>	<p>【Option 1 accessories set】: 1 set of rocker arm joints, 1 aluminum frame, 1 battery compartment, 2 frame horizontal bars, 2 frame vertical bars, 1 carbon steel shell.</p> <p>【Option 2 Accessories set】: 1 set of aluminum sleeve joints, 1 aluminum frame, 2 horizontal frame bars, 2 vertical frame bars, 1 carbon steel shell.</p>
Storage temperature	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip66
Products size (mm)	L615*365*160	L720*365*160	L615*365*160



Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-015S

180W

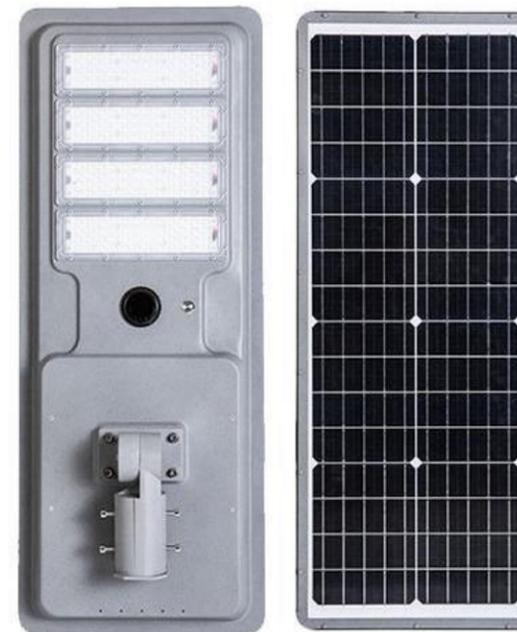


Battery



LED chip



Controller



Solar panel

Product Parameter

Model	HZ-TY-015S	HZ-TY-015S	HZ-TY-015S
Solar panel(MONO)	5V/35W	5V/40W	5V/60W
High capacity lithium battery (Built-in)	3.2V40AH	3.2V 50AH	3.2V 60AH
Control method	10A controller	10A controller	10A controller
Material	Aluminum alloy	Aluminum alloy	Aluminum alloy
Description	<p>【Option 1 accessories set】:1 set of rocker arm joints, 1 aluminum frame, 1 battery compartment, 2 frame horizontal bars, 2 frame vertical bars, 1 carbon steel shell.</p> <p>【Option 2 Accessories set】: 1 set of aluminum sleeve joints, 1 aluminum frame, 2 horizontal frame bars, 2 vertical frame bars, 1 carbon steel shell.</p>	<p>【Option 1 accessories set】:1 set of rocker arm joints, 1 aluminum frame, 1 battery compartment, 2 horizontal frame bars, 2 vertical frame bars, 1 carbon steel shell.</p> <p>【Option 2 Accessories set】: 1 set of aluminum socket joints, 1 aluminum frame, 2 horizontal frame bars, 2 vertical frame bars, 1 carbon steel shell.</p>	<p>【Option 1 accessories set】:1 set of rocker arm joints, 1 aluminum frame, 1 battery compartment, 2 horizontal frame bars, 2 vertical frame bars, 1 carbon steel shell.</p> <p>【Option 2 Accessories set】: 1 set of aluminum socket joints, 1 aluminum frame, 2 horizontal frame bars, 2 vertical frame bars, 1 carbon steel shell.</p>
Products size (mm)	L615*365*160MM	L720*365*160MM	L930*365*160MM

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-TY-018



PRODUCT DESCRIPTION



【DUSK TO DAWN】

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.

Product Parameter

Model	HZ-TY-018 100W	HZ-TY-018 150W	HZ-TY-018 200W	HZ-TY-018 250W
Solar panel(MONO)	18V 40W	18V 50W	18V 60W	18V 70W
High capacity lithium battery (Built-in)	12V12Ah	12V 18Ah	12V 24Ah	12V 30Ah
LED Chip	SMD3030	SMD3030	SMD3030	SMD3030
Install height	4-5m	5-6m	6-7m	7-9m
Lighting time	12-16 hours of Sustainable Lighting			
Rainy Days Support	3-5 days with full charging			
Working Time (per day)	>12 hours	>12 hours	>12 hours	>12 hours
Charging time	4-6H	4-6H	4-6H	4-6H
Material	Aluminum alloy	Aluminum alloy	Aluminum alloy	Aluminum alloy
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Products dimension(mm)	686*351*45	839*351*45	1081*351*45	1231*351*45

Light distribution curve

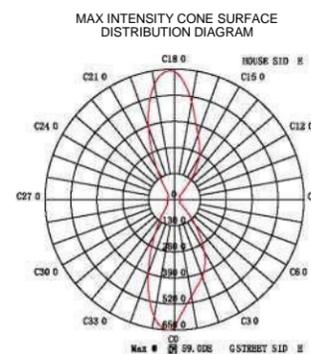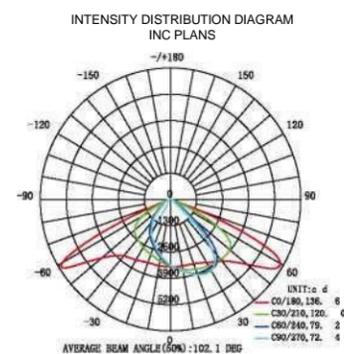



ALL IN ONE SOLAR STREET LIGHT HZ-TY-019



Product Parameter

Model	HZ-TY-019
Solar panel(MONO)	6V 27W(mono)
High capacity lithium battery (Built-in)	3.7V/25AH
LED Chip	5730
Material	ABS
Charing time	4-6H
Rainday working	2-3days
Working time	12-16 hours
Beam angle	120°
Color	3000-7000K
Storage temperature	0-55°C
Operating humidity	M90%RH
Waterproof level	Ip65
Products size	841*280*133mm

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



ALL IN ONE SOLAR STREET LIGHT HZ-ABS-001



Product Parameter

Model	HZ-ABS-001-90W	HZ-ABS-001-120W	HZ-ABS-001-150W	HZ-ABS-001-180W	HZ-ABS-001-240W	HZ-ABS-001-360W
Solar panel (poly)	6V / 10W	6V / 13W	6V / 18W	6V / 18W	6V / 25W	6V / 30W
Capacity	10AH	12AH	20AH	18AH	25AH	30AH
LED Chip	270pcs	360pcs	450pcs	480pcs	640pcs	800pcs
Material	ABS	ABS	ABS	ABS	ABS	ABS
Charging time	6-8H	6-8H	6-8H	6-8H	6-8H	6-8H
Rainday working	2-3days	2-3days	2-3days	2-3days	2-3days	2-3days
Working time	12-16H	12-16H	12-16H	12-16H	12-16H	12-16H
Lumen	120lm/w	120lm/w	120lm/w	120lm/w	120lm/w	120lm/w
LED power	90W	120W	150W	180W	240W	360W
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65	Ip65	Ip65
Lamp Size(mm)	485*220*68	595*238*68	695*243*68	343*448*70	343*598*70	343*675*70

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



SPLIT SOLAR STREET LIGHT HZ-ST-001



Product Parameter

Modelz	HZ-ST-001 50W	HZ-ST-001 100W	HZ-ST-001 150W	HZ-ST-001 200W High brighter
Solar panel(MONO)	6V / 25W	6V / 30W	6V / 40W	18V / 100W
High capacity lithium battery (Built-in)	3.2V / 20AH	3.2V / 30AH	3.2V / 40AH	12V / 30AH
LED Chip	50pcs , SMD3030	100pcs , SMD3030	150pcs , SMD3030	150pcs , SMD3030
Material	Aluminum body	Aluminum body	Aluminum body	Aluminum body
Charing time	4-6H	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days	2-3days
Lighting time	>12 hours	>12 hours	>12 hours	>12 hours
Arm rod size	60 mm	60 mm	60 mm	60 mm
Installation height	3-5M	3-5M	3-5M	3-5M
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Products size (mm)	500*215*65	580*210*80	680*250*80	680*250*80

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



SPLIT SOLAR STREET LIGHT HZ-STY-002S



Product Parameter

Model	HZ-STY-002S 100W	HZ-STY-002S 200W	HZ-STY-002S 300W	HZ-STY-002S 500W	HZ-STY-002S 600W	HZ-STY-002S 800W
Solar panel(MONO)	6V / 15W	6V / 20W	6V / 30W	6V / 35W	6V / 40W	6V / 50W
lithium battery (Built-in)	3.2V 15000mAh	3.2V 20000mAh	3.2V 25000mAh	3.2V 30000mAh	3.2V 40000mAh	3.2V 50000mAh
LED Chip	210PCS SMD5730	362PCS SMD5730	610PCS SMD5730	1032PCS SMD5730	1622PCS SMD5730	2010PCS SMD5730
Material	Aluminum body					
Charing time	4-6H	4-6H	4-6H	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days	2-3days	2-3days	2-3days
Working time	>12hours	>12hours	>12hours	>12hours	>12hours	>12hours
Arm rod size	60-76 mm					
Color	3000-6500K	3000-6500K	3000-6500K	3000-6500K	3000-6500K	3000-6500K
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65	Ip65	Ip65
Products size (mm)	343*95*57	385*142*55	500*200*50	500*210	500*210	500*210

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



SPLIT SOLAR STREET LIGHT HZ-STY-004



Product Parameter

Model	HZ-STY-004 100W	HZ-STY-004 200W
Solar panel(Poly)	6V / 30W	6V / 40W
High capacity lithium battery (Built-in)	3.2V / 30AH	3.2V / 40AH
LED Chip	120PCS SMD3030	240PCS SMD3030
Material	Aluminum body	Aluminum body
Charing time	4-6H	4-6H
Rainday working	2-3days	2-3days
Working time	>12hours	>12hours
Color	3000-6500K	3000-6500K
Arm rod size	60-76 mm	60-76 mm
Storage temperature	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH
Waterproof level	Ip65	Ip65
Products size (mm)	495*213*55	495*213*55

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



SPLIT SOLAR STREET LIGHT HZ-STY-008

200W




Battery



LED chip



Controller



Solar panel

Product Parameter

Item NO	Specification	Solar capacity	LED Chip type&qty	Lamp size
HZ-STY-008 100W 3.2V	LEDs: SMD3030 Material: Aluminum body Waterproof: IP65 Charging time: 4-6H Rainday working: 2-3days Working time: >12hours Arm rod size: 60-76 mm diameter Control: Light+time control Color: 3000-6500K Certificates: CE CRI>75 Warranty 3 years	1.Solar panels: 6V 50w Polycrystalline 2.Battery: 3.2V 40AH lithium iron phosphate battery	100PCS SMD3030	510*265*80
HZ-STY-008 150W 3.2V		1.Solar panels: 6v 70w Polycrystalline 2.Battery: 3.2V 50AH lithium Lifepo4	150PCS SMD3030	600*265*80
HZ-STY-008 200W 3.2V		1.Solar panels:6V 90W Polycrystalline 2.Battery: 3.2V 60AH lithium Lifepo4	200PCS SMD3030	690*265*80
HZ-STY-008 100W 12V		1.Solar panels: 18v 50w Polycrystalline 2.Battery: 12V 18AH lithium	100PCS SMD3030	510*265*80
HZ-STY-008 150W 12V		1.Solar panels: 18v 70w Polycrystalline 2.Battery: 12V 24AH lithium	150PCS SMD3030	600*265*80
HZ-STY-008 200W 12V		1.Solar panels: 18V 90W Polycrystalline 2. Battery: 12V 30AH lithium	200PCS SMD3030	690*265*80

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



SPLIT SOLAR STREET LIGHT HZ-STY-024



Product Parameter

Model	HZ-STY-024 100W	HZ-STY-024 150W	HZ-STY-024 200W
Solar panel(Poly)	6V / 30W	6V / 40W	6V / 50W
High capacity lithium battery (Built-in)	3.2V / 24AH	3.2V / 36AH	3.2V / 48AH
LED Chip	120PCS SMD3030	180PCS SMD3030	240PCS SMD3030
Material	Aluminum body	Aluminum body	Aluminum body
Charing time	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days
Working time	>12hours	>12hours	>12hours
Arm rod size	60-76 mm	60-76 mm	60-76 mm
Color	3000-6500K	3000-6500K	3000-6500K
Storage temperature	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65
Products size (mm)	486*165*72	545*206*72	623*235*72

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



SPLIT SOLAR STREET LIGHT HZ-CTY-01



Product Parameter

Modelz	HZ-CTY01 50W	HZ-CTY01 100W	HZ-CTY01 150W	HZ-CTY01 200W
Solar panel(Poly)	6V / 25W	6V / 35W	6V / 40W	6V / 50W
High capacity lithium battery (Built-in)	3.2V 20AH	3.2V / 30AH	3.2V / 40AH	3.2V / 48AH
LED Chip	50PCS SMD3030	100PCS SMD3030	150PCS SMD3030	200PCS SMD3030
Materail	Aluminum body	Aluminum body	Aluminum body	Aluminum body
Charing time	4-6H	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days	2-3days
Working time	>12hours	>12hours	>12hours	>12hours
Arm rod size	60-76 mm diameter	60-76 mm diameter	60-76 mm diameter	60-76 mm diameter
Color	3000-6500K	3000-6500K	3000-6500K	3000-6500K
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Products size (mm)	500*210*85	500*210*85	550*210*85	710*260*85

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



SPLIT SOLAR STREET LIGHT HZ-XJ



Product Parameter

Model	HZ-XJ-100W	HZ-XJ-200W	HZ-XJ-300W	HZ-XJ-400W
Solar panel(MONO)	5V / 25W	5V / 35W	5V / 40W	5V / 50W
High capacity lithium battery (Built-in)	18000mAH	30000mAH	36000mAH	48000mAH
LED Chip	192pcs	192pcs	300pcs	300pcs
Material	Aluminum body	Aluminum body	Aluminum body	Aluminum body
Charing time	4-6H	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days	2-3days
Working time	>12hours	>12hours	12hours	12hours
Arm rod size	60mm	60mm	60mm	60mm
DiameterInstallation method	wall mounting and arm mounting are acceptable			
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Lamp size (mm)	520*260*80	520*260*80	600*300*80	600*300*80

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



SPLIT SOLAR STREET LIGHT HZ-JDTY01




Product Parameter

Model	HZ-JDTY01-50W	HZ-JDTY01-60W	HZ-JDTY01-100W	HZ-JDTY01-150W
Solar panel(MONO)	6V / 25W	6V / 35W	6V / 50W	6V / 60W
High capacity lithium battery (Built-in)	3.2V / 20AH	3.2V / 30AH	3.2V / 40AH	3.2V / 60AH
LED Chip	SMD3030	SMD3030	SMD3030	SMD3030
Material	Aluminum body	Aluminum body	Aluminum body	Aluminum body
Charing time	4-6H	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days	2-3days
Working time	>12hours	>12hours	12hours	>12hours
Arm rod size	60 mm diameter	60 mm diameter	60 mm diameter	60 mm diameter
Installation method	wall mounting and arm mounting are acceptable			
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Lamp size (mm)	360*150*70	495*205*70mm	495*205*70	700*280*100

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.

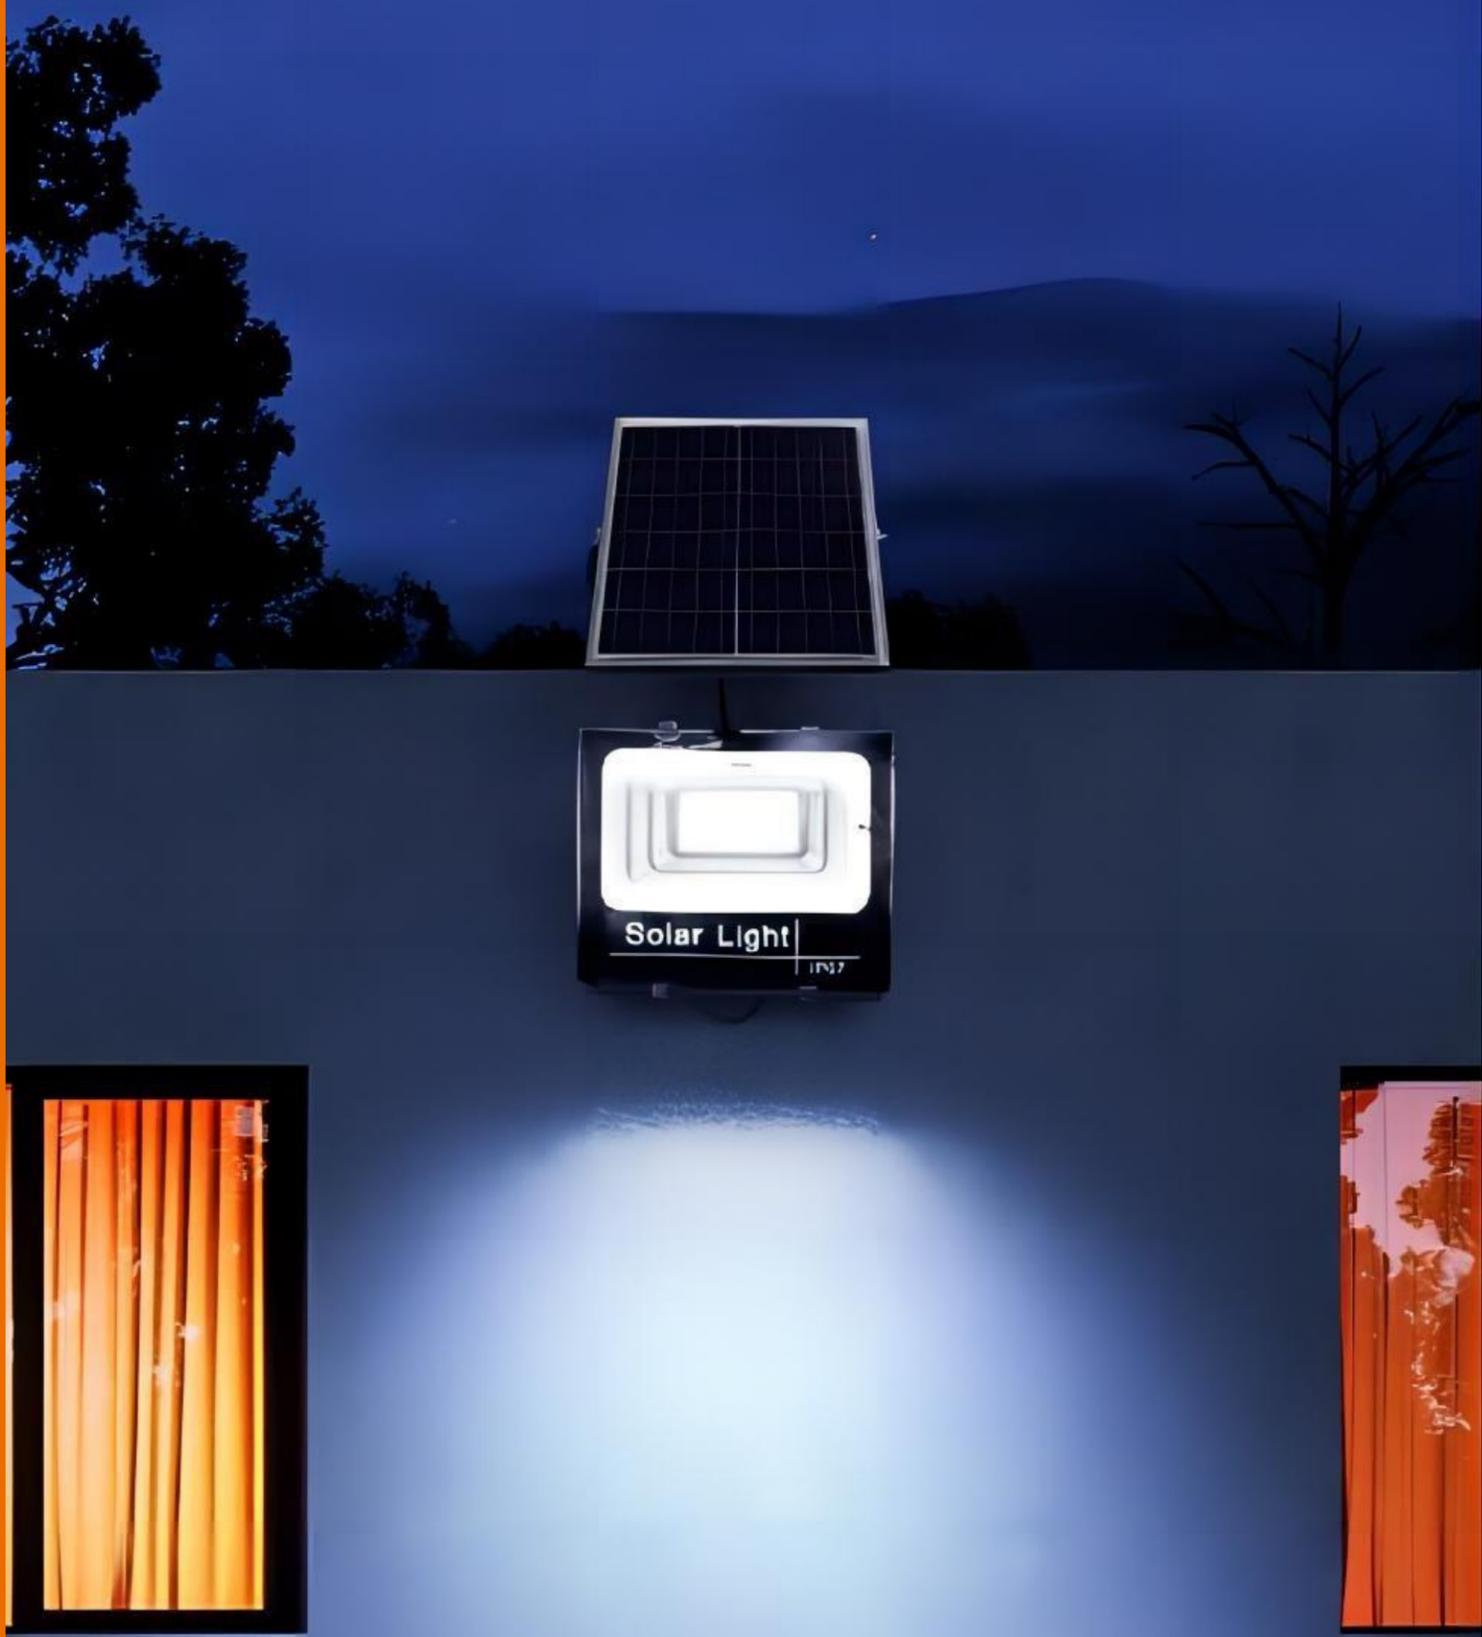

SOLAR FLOOD LIGHT HZ-FTY-2X



Product Description

- High-efficiency monocrystalline solar panel with fast charging and long life-span.
- Long-term environmental Batteries with overcharge and over discharge protection .more safe and reliable.
- High capacity lithium iron phosphate battery
- High-efficiency LED chip for working over than 20000hours lighting.
- Will light up from dusk to dawn automatically.
- Working time is more than 12 hours



Product Parameter

Item NO	Specification	Solar capacity	Solar panel	Battery	Dimension (mm)
HZ-FTY-2X 40W	1. Materail: Die-cast aluminum 2. LED chip : SMD5730 3. Waterproof : IP65 4. Discharging time : 12-14 hours 5. Charging time : 6-7 hours 6. Lifetime : >50000 hours 7. Working time : 10-12 hours 8. Control method : Light control + Remote control 9. Warranty : 3years	SMD5730 72pcs	6V / 8W	3.2V / 5AH	227*180*50
HZ-FTY-2X 60W		SMD5730 90pcs	6V / 12W	3.2V / 10AH	252*208*65
HZ-FTY-2X 100W		SMD5730 208pcs	6V / 20W	3.2V / 15AH	303*248*72
HZ-FTY-2X 200W		SMD5730 398pcs	6V / 25W	3.2V / 20AH	335*270*78
HZ-FTY-2X 300W		SMD5730 622pcs	6V / 30W	3.2V / 30AH	400*350*85
HZ-FTY-2X 400W		SMD5730	6V / 35W	3.2V / 35AH	395*335*56
HZ-FTY-2X 500W		SMD5730	6V / 40W	3.2V / 40AH	460*370*56
HZ-FTY-2X 1000W		SMD5730	6V / 50W	3.2V / 50AH	460*370*56



SOLAR FLOOD LIGHT HZ-TF-CCTV



Product Description

- High-efficiency monocrystalline solar panel with fast charging and long life-span.
- Long-term environmental Batteries with overcharge and over discharge protection .more safe and reliable.
- High capacity lithium iron phosphate battery
- High-efficiency LED chip for working over than 20000hours lighting.
- Will light up from dusk to dawn automatically.
- Working time is more than 12 hours



Battery



LED chip



Solar panel

Product Parameter

Model	CCTV-100W	CCTV-200W	CCTV-300W	CCTV-400W
Solar panel(Poly)	5V / 20W	5V/28W	5V/35W	5V/40W
High capacity lithium battery (Built-in)	Lithium iron phosphate 12Ah	Lithium iron phosphate 24Ah	Lithium iron phosphate 30Ah	Lithium iron phosphate 42Ah
LED Chip	82pcs,2835	144pcs,2835	236pcs,2835	324pcs,2835
Material	Plastic	Plastic	Plastic	Plastic
Charging time	5-6h	5-6h	5-6h	5-6h
Rainday working	2-3days	2-3days	2-3days	2-3days
Working Mode	4 hours + radar			
Camera	2 million pixels, real-time monitoring throughout the day	2 million pixels, real-time monitoring throughout the day	2 million pixels, real-time monitoring throughout the day	2 million pixels, real-time monitoring throughout the day
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Lamp size(mm)	217*179*45	258*213*45	312*270*50	365*295*50



SOLAR GARDEN LIGHT HZ-SGL-UFO



Product Description

- High-efficiency monocrystalline solar panel with fast charging and long life-span.
- Long-term environmental Batteries with overcharge and over discharge protection .more safe and reliable.
- High capacity lithium iron phosphate battery
- High-efficiency LED chip for working over than 20000hours lighting.
- Will light up from dusk to dawn automatically.
- Working time is more than 12 hours



Battery



LED chip



Solar panel

Product Parameter

Model	HZ-SGL-UFO-25W	HZ-SGL-UFO-35W	HZ-SGL-UFO-50W
Solar paenl(Poly)	5V / 25W	5V / 35W	5V / 50W
High capacity lithium battery (Built-in)	3.2V / 25AH	3.2V / 35AH	3.2V / 50AH
LED Chip	SMD3030	SMD3030	SMD3030
Materail	Aluminum body	Aluminum body	Aluminum body
Charing time	4-6H	4-6H	4-6H
Rainday working	2-3days	2-3days	2-3days
Working time	>12hours	>12hours	>12hours
LED Lumen	>120lm/w	>120lm/w	>120lm/w
Install height	3-4M	3-4M	3-4M
Storage temperature	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65
Lamp size(mm)	505*505*265	505*505*265	680*680*340



SOLAR CARDEN LIGHT HZ-SGL-UFO31



Product Description

- High-efficiency monocrystalline solar panel with fast charging and long life-span.
- Long-term environmental Batteries with overcharge and over discharge protection .more safe and reliable.
- High capacity lithium iron phosphate battery
- High-efficiency LED chip for working over than 20000hours ligthing.
- Will light up from dusk to dawn automatically.
- Working time is more than 12 hours



Battery



LED chip



Solar panel

Product Parameter

Model	HZ-SGL-UFO1	HZ-SGL-UFO1	HZ-SGL-UFO1	HZ-SGL-UFO1
Solar paenl(Poly)	6V / 15W	6V / 15W	6V / 21W	6V / 21W
High capacity lithium battery (Built-in)	3.2v 16000mah	3.2v 16000mah	3.2V 20000mah	3.2V 20000mah
LED Chip	240pcs,5730	120pcs,5730	400pcs,5730	200pcs,5730
Materail	Plastic	Plastic	Plastic	Plastic
Charing time	5-6h	5-6h	5-6h	5-6h
Rainday working	2-3days	2-3days	2-3days	2-3days
Lighting time	12-16 hours	12-16 hours	12-16 hours	12-16 hours
Exposure area	about 100m ²	about 100m ²	about 100m ²	about 100m ²
Install height	below 4 meters	below 4 meters	below 5 m	below 5 m
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Lamp size(mm)	420*125	420*125	550*125	550*125



SOLAR GARDEN LIGHT HZ-SGL-UFO32



Product Description

- High-efficiency monocrystalline solar panel with fast charging and long life-span.
- Long-term environmental Batteries with overcharge and over discharge protection .more safe and reliable.
- High capacity lithium iron phosphate battery
- High-efficiency LED chip for working over than 20000hours ligthing.
- Will light up from dusk to dawn automatically.
- Working time is more than 12 hours



Battery



LED chip



Solar panel

Product Parameter

Model	HZ-SGL-UFO2
Solar paeni(Poly)	20W / 5V
High capacity lithium battery (Built-in)	25AH
LED Chip	SMD3030
Materail	Aluminum body
Charing time	4-6H
Rainday working	2-3days
Working time	>12hours
LED Lumen	>120lm/w
Install height	3-4M
Storage temperature	0-55°C
Operating humidity	M90%RH
Waterproof level	Ip65
Lamp size(mm)	340*340*140



SOLAR LIGHT STRIP



Product Parameter

Model	Solar light strip
Lamp strip voltage	24V
High capacity lithium battery (Built-in)	3.2V/30AH
LED Chip	SMD 2835
Material	Silicone
Charing time	5 hours
Endurance time	12-16 hours
Installation method	ground pluggable and wall mountable
Color Temperature	3000-6000K
Storage temperature	0-55°C
Waterproof level	Ip65
Warranty	2 years

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



SOLAR CEILING LIGHT



Product Parameter

Model	HZ-TCD-60W	HZ-TCD-80W	HZ-TCD-100W	HZ-TCD-120W
Solar panel	10W/6v Poly	15W/6v Poly	20W/6v Poly	25W/6v Poly
Voltage	32650 6000MAH/3.2V	32650 12000MAH/3.2V	32650 15000MAH/3.2V	32650 20000MAH/3.2V
LED Chip	2835/96PCS	2835/136PCS	2835/200pcs	2835/400PCS
Material	ABS	ABS	ABS	ABS
Charing time	5-6H	5-6H	5-6H	IP65
Rainday working	2-3days	2-3days	2-3days	2-3days
Working time	12-16hours	12-16hours	12-16hours	12-16hours
Control	Light+Remote	Light+Remote	Light+Remote	Light+Remote
Irradiation Area	60m ²	80m ²	100m ²	120m ²
Storage temperature	0-55°C	0-55°C	0-55°C	0-55°C
Operating humidity	M90%RH	M90%RH	M90%RH	M90%RH
Waterproof level	Ip65	Ip65	Ip65	Ip65
Dimension	φ235	φ275	φ320	φ370

Product Description

The solar power street light will light up from dusk to dawn automatically, large capacity battery offer a good output, The remote switching is a great plus. at night and can see all around you.



SOLAR FLOOD LIGHT HZ-FTY-2X



Product Description

- High-efficiency monocrystalline solar panel with fast charging and long life-span.
- Long-term environmental Batteries with overcharge and over discharge protection .more safe and reliable.
- High capacity lithium iron phosphate battery
- High-efficiency LED chip for working over than 20000hours lighting.
- Will light up from dusk to dawn automatically.
- Working time is more than 12 hours



Battery



LED chip



Solar panel

Product Parameter

Item NO	Version	Specifications
Q5ProB	WIFI	·2.5Inch Starlight WiFi PTZ solar battery Camera ·2MP 1080P Ingenic T31ZL+2063 ·4MP 1920P Ingenic T31ZX+4653 ·Solar panel: 6W ·Material: Plastic ·Power supply: 3.7V, built-in 14400 mA battery
Q5ProB-tuya		
Q5ProB-4G	SE	·2.5 Inch Starlight 4G PTZ solar battery Camera ·2MP 1080P Ingenic T31ZL+2063 ·4MP 1920P Ingenic T31ZX+4653 ·Network protocol: TCP/IP, HTTP, TCP, UDP, SMTP, DHCP, DNS, P2 ·Support the 4G network in the United States, Europe, Southeast Asia, Japan, China ·Solar panel: 6W ·Material: Plastic ·Power supply: 3.7V built-in 14400 mAh battery ·Function: With warm light and infrared light, night vision color can be switched in black and white, two-way voice, support for multiple languages, PIR infrared alarm
	AU	
	JP	
	EU	
	US	
	CN	
	EU	

oceanic elinett



 + 221 77 421 10 40

 www.oceanic-sn.com

 Dakar, Mermoz Rue MZ 146 , N° 7184.  info@oceanic-sn.com